


This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary



DRAWING

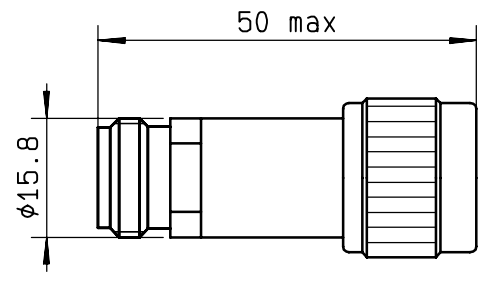

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 2 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 10 dB

FREQUENCY	DC- 2 GHz
V.S.W.R	<= 1.15
DEVIATION (dB)	+0.35 / - 0.35


PEAK POWER at 25°C (1µs,1%.) : 100 W
 AVERAGE POWER at 25°C : 2 W

MECHANICAL CHARACTERISTICS

CONNECTORS : N male/female per MIL-C 39012
 WEIGHT : < 60 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

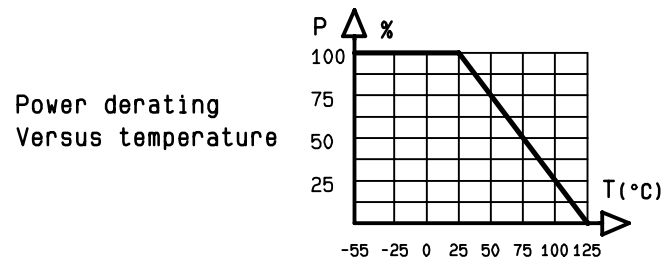

CREATION				
N° :				
PEN/EP:CAT				
Name:MG				
Date:26. apr. 95				
APP.:AF				
ISSUE		REVISIONS		NAME APPR.

RADIAL[®]
 101. rue P. Hoffmann -Z.I Ouest-
 93116 ROSNY/BOIS Cedex-FRANCE
 Phone :33(1)49353535
 Fax :33(1)48546363
 Tlx RADIA 235220F