


Multipack 24 pcs – keystones Solarix CAT5E UTP RJ45 toolless

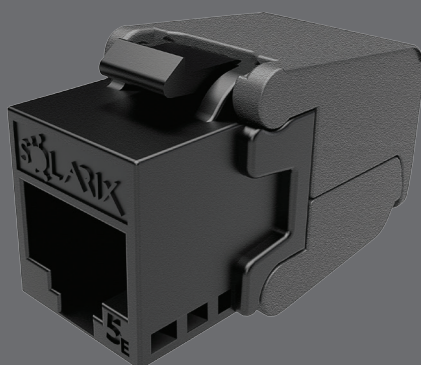

Product number:
25286711

Type number:
S XKJ-5E-UTP-BK-SA

EAN barcode:
8595684703245



Key features

- Quality unshielded category 5E/Class D keystones
- Designed for ethernet protocols, including 2.5GBASE-T and 5GBASE-T*
- Very easy toolless installation
- 50 pin gold contact plating
- The keystones meet the ISO/IEC 11801, EN 50173, and ANSI/TIA 568.2-D cabling standards
- Their form factor complies with the requirements of the EN 60603-7 specifications (i.e. the keystones are compatible with other manufacturers' modular outlets that meet this standard)
- The colour of the keystones is black
- The multipack packaging significantly speeds up the installation of these Solarix keystones and also is more environmentally friendly (i.e. without any plastic packaging)

Cabling standards

General standards
Product standards

EN 50173-1, EN 50173-2, ISO/IEC 11801-1, ISO/IEC 11801-2, ANSI/TIA 568.2-D
EN 60603-7-2

Supported protocols

	10BASE-T	100BASE-TX	1000BASE-T	2.5GBASE-T	5GBASE-T
Supported by the S XKJ-5E-UTP-BK-SA keystones	YES	YES	YES	YES*	YES*

*) For the 2.5GBASE-T and 5GBASE-T protocols, the operability success and distance achieved may vary depending on the type and quality of installation.



+420 840 505 555 • info@solarix.cz
www.solarix.cz

Supported PoE

	802.3af	802.3at
PoE type	Type 1	Type 2
Maximum current	350 mA	600 mA
No. of pairs used	2	2
Supported by the SXXJ-5E-UTP-BK-SA keystones	YES	YES

Physical parameters

Keystones construction	UTP
Number of ports in the multipack	24x RJ45 8p8c
Min. port lifetime	1000 connections/disconnections
Contacts plating	50 µin gold
Termination	toolless
Size and type of conductor	AWG 26 – 22, solid wire
Material of non-metallic parts	FR plastic according to UL94-0
Keystones body colour	black


Operation and storage

Operating temperature	-10 to 60 °C
Storage temperature	-40 to 70 °C
Max. operating humidity	93%

Logistic parameters

Keystones packaging size (h x w x d)	60 mm x 148 mm x 120 mm, carton box
Weight	225 g
Included in the multipack	24x keystone, 24x plastic cap with wiring map
Master packaging	24x multipack (576 keystones)
Master packaging size (h x w x d)	270 mm x 370 mm x 320 mm, carton box
Batch marking	yes (on the products, its packaging and on the transport master box)
Batch and product numbers barcode	IDAutomation Code 39, ANSI/ISO/AIM specification
EAN code type	EAN-13

Keystones label

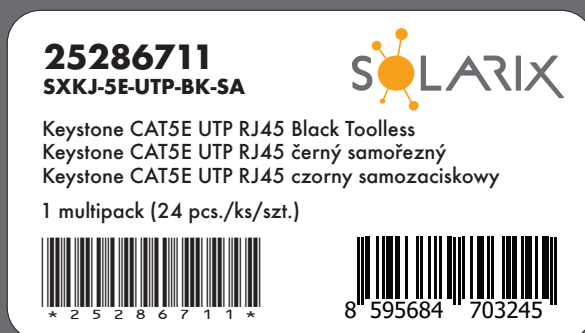

Solarix warranties

Standard warranty	5 years
System warranty	30 years

Related products

Product Number	Type Number	Description
27655141	SXKD-5E-UTP-PVC	Installation Cable Solarix CAT5E UTP PVC Eca 305m/box
27655150	SXKD-5E-UTP-PVC	Installation Cable Solarix CAT5E UTP PVC Eca 500m/box
27655151	SXKD-5E-UTP-PVC	Installation Cable Solarix CAT5E UTP PVC Eca 1000m/reel
27724130	SXKD-5E-UTP-PVC	Installation Cable Solarix CAT5E UTP PVC Eca 100m/box
27724119	SXKD-5E-UTP-LSOH	Installation Cable Solarix CAT5E UTP LSOH Dca-s1,d2,a1 305m/box
27724125	SXKD-5E-UTP-LSOH	Installation Cable Solarix CAT5E UTP LSOH Dca-s1,d2,a1 500m/box
27655171	SXKD-5E-UTP-LSOH	Installation Cable Solarix CAT5E UTP LSOH Dca-s1,d2,a1 1000m/reel
27724131	SXKD-5E-UTP-LSOH	Installation Cable Solarix CAT5E UTP LSOH Dca-s1,d2,a1 100m/box
27655191	SXKD-5E-UTP-PE	Installation Cable Solarix CAT5E UTP PE Fca Outdoor 305m/box
27655196	SXKD-5E-UTP-PEG	Installation Cable Solarix CAT5E UTP PE Fca GEL-FILLED Outdoor 305m/box
24000100	SX24M-0-STP-BK-UNI-N	Unloaded Patch Panel Solarix 24 ports Black 1U
23100101	SX9-1-0-WH	Solarix Modular Wall Outlet for 1 Keystone, White
23100102	SX9-2-0-WH	Solarix Modular Wall Outlet for 2 Keystones, White
23100103	SX9-3-0-WH	Solarix Modular Wall Outlet for 3 Keystones, White
23100201	SXF-M-1-22,5-WH-P	French Style Module Solarix 22.5 x 45mm for 1 Keystone, 90°
23100202	SXF-M-1-45-WH-P	French Style Module Solarix 45 x 45mm for 1 Keystone, 90°
23100203	SXF-M-2-45-WH-P	French Style Module Solarix 45 x 45mm for 2 Keystones, 90°
23100204	SXF-M-2-45-WH-U	French Style Module Solarix 45 x 45mm for 2 Keystones, 45°
23100206	SXF-M-1-22,5-WH-U	French Style Module Solarix 22.5 x 45mm for 1 Keystone, 45°

