



SXOB-SC-DIN-2



Protection	IP 20
Installation method	DIN rail
Capacity	4/8
Compatibility	2/4x SC simplex, 2/4x LC duplex, 2/4x E2000
Number of cable entries	9 x 5 mm
Number of cable outputs	2/4
Width x Depth x Height	18 x 60 x 85 mm 32 x 60 x 85 mm
Weight	0.03/0.05 kg
Colour	white
Operating temperature	-25 to +70 °C

Package contents

- 1x optical box for DIN rail
- 2x flexible cable tie
- 4x 45 mm splice protector

FIBRE MANAGEMENT

Fiber optical box with DIN rail mounting

IP 20

Solarix optical box for terminating optical cables in distribution boards with DIN rail mounting. Allows you to terminate 4 fibers in combination with 2/4x SC simplex adapters or 2/4x E2000 adapters. Also up to 4/8 fibers in combination with 2/4x LC duplex adapters. This box is suitable and fully compatible with all optical adapters without flanges. The package includes cable ties for securing the optical cable to the box, and 45 mm splice protectors. There is a passage for the optical cable on the top. The maximum suitable length of the splice protectors is 45 mm.

Part No.


Description

SXOB-SC-DIN-2

Fiber optical box with DIN rail mounting 2x SC adapters

SXOB-SC-DIN-4

Fiber optical box with DIN rail mounting 4x SC adapters

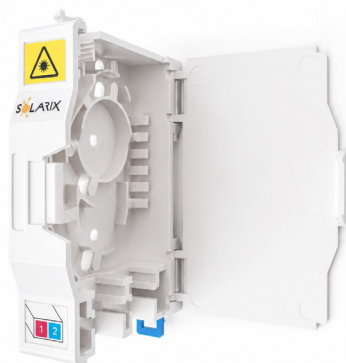

SXOB-SC-DIN-2



SXOB-SC-DIN-4